

SPIKA NG 360

SELF-CONTAINED ICE CUBE MACHINE

115 V / 60 Hz

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



	 24 H	 70°F/20°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 STOCK	 in (mm)	 in (mm)	 SPIKA HALF DICE 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
		lbs (Kg)		lbs (Kg)		lbs (Kg)			
SPIKA NG 360 A		340 (154)		273 (124)		99 (45)	Width 30" (762) Depth 30" (762) Height* 32.76" (832)	Width 33.08" (840) Depth 32.48" (825) Height 37.41" (950)	 SPIKA FULL DICE 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 360 W		-		-					

* WITH LEGS 39"

ACCESSORIES

INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP




10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
PRO-101 K
#6759A



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
PRO-10
#33742



SCALE KLEEN
#33492




ONE FOOT PAD
ITEM #4144


TECHNICAL SCHEME

SPIKA NG 360


SIDE VIEW

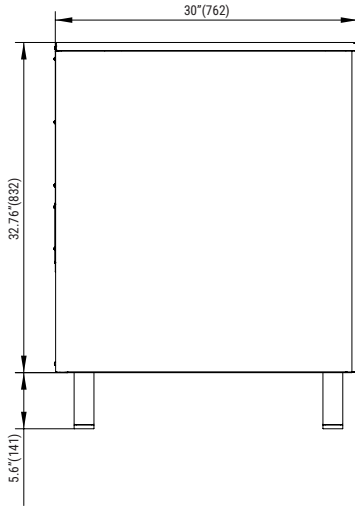

FRONTAL VIEW

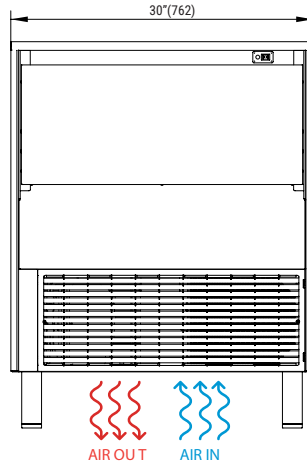

REAR VIEW

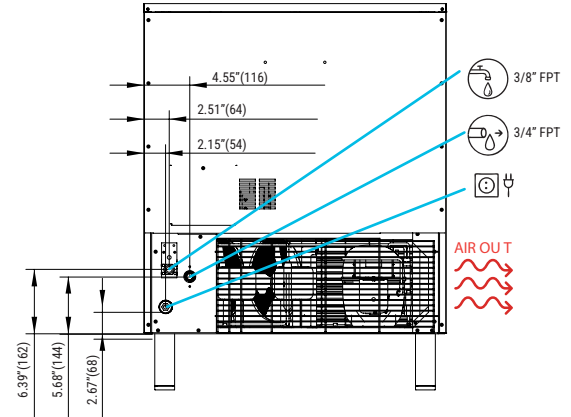

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) / 87 psi (6 bar)

144/288 Ice cubes/cycle

V	Hz	ph
115	60	1N



FULL DICE
SPIKA NG 360 AIR COOLED

°F °C	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	361	354	355	346
68° 20°	344	339	335	331
90° 32°	306	282	273	264
109° 43°	247	225	205	190

FULL DICE
SPIKA NG 360 WATER COOLED

°F °C	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	-	-	-	-
68° 21°	-	-	-	-
90° 32°	-	-	-	-
109° 43°	-	-	-	-

MODELS

SPIKA NG 360 A

SPIKA NG 360 W

	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
SPIKA NG 360 A	6,791 1,989	787	16/1,5	3	16	6.35	21.3z 11.5	5,353 1,568	163 187,5
SPIKA NG 360 W	- -	-	-	-	-	-	-	-	-

ITV
ICE makers

ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com

TECHNICAL ASSISTANCE
ITV
ICE makers

SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST

WARRANTY:
ICE MAKERS - 3 YEARS PARTS AND LABOR
EVAPORATOR - 5 YEARS PARTS AND LABOR
COMPRESSOR - 5 YEARS PARTS



VERTICAL SYSTEM