

ALFA NG 135

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 4.1" TO 0.2"



	 24 H	 70°F/21°C 50°F/10°C lbs (Kg)	 90°F/32°C 70°F/21°C lbs (Kg)	 55 (25)	 in (mm)	 in (mm)	
ALFA NG 135 A		130 (59)	101 (46)	55 (25)	Width 21.07"(535) Depth 23.43"(595) Height* 31.30"(795)	Width 24.02"(610) Depth 25.60"(650) Height 36.22"(920)	ALFA 17/21cc 1.5" (W) x 1" (D) x 1.2" (H) 39 mm (W) x 27 mm (D) x 30 mm (H) Average dimensions
ALFA NG 135 W		141 (64)	110 (50)				

* WITH LEGS 35"/37"

ACCESSORIES

INCLUDED




NOT INCLUDED (OPTIONAL)




TECHNICAL SCHEME

ALFA NG 135


RIGHT SIDE VIEW

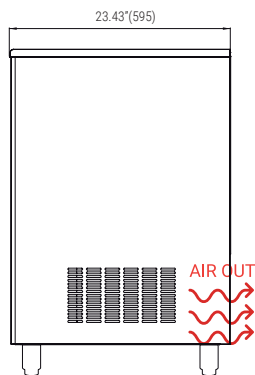

FRONTAL VIEW

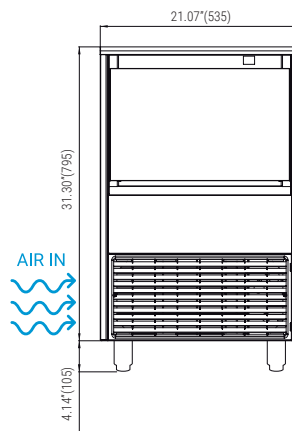

REAR VIEW

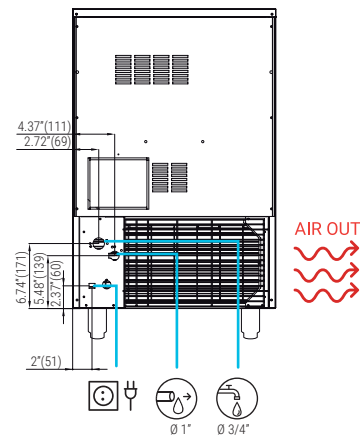

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) /87 psi(6 bar)

45 Ice cubes/cycle

R 404 A		
V	Hz	ph
115	60	1N

ALFA NG 135 AIR COOLED					
	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°	137	128	118	106	
68° 21°	130	121	112	100	
90° 32°	118	110	101	89	
109° 43°	102	94	85	70	

ALFA NG 135 WATER COOLED					
	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°	149	139	129	115	
68° 21°	141	131	122	109	
90° 32°	128	119	110	97	
109° 43°	111	102	93	76	

MODELS

		ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
ALFA NG 135 A		5,285 1,549	650	14/1.5 3	15	8.9	71 14.7	4,125 1,209	123	134
ALFA NG 135 W		5,285 1,549	650	14.5/1.5 3	15	7.6	200 44.7	4,125 1,209	123	134



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

