

SPIKA MS400-22

115 V / 60 Hz

MODULAR 22 INCH ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H	 70°F/20°C lbs (Kg)	 50°F/10°C lbs (Kg)	 90°F/32°C lbs (Kg)	 70°F/21°C lbs (Kg)	 in (mm)	 in (mm)	 SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA MS400-22 H		432 (196)	348 (158)	Width	22"(559)	Width	26"(650)	 SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA MS400-22 F		- (-)	- (-)	Depth	24"(621)	Depth	28"(710)	
				Height	26"(659)	Height	32"(820)	

ACCESSORIES

INCLUDED



SCOOP


NOT INCLUDED



DOUBLE 10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS102



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



ADAPTER PLATES



SCALE KLEEN

RECOMMENDED BINS

RECOMMENDED



S400
+
SPIKA
MS400-22



SCS350
+
SPIKA
MS400-22

OTHER POSSIBLE OPTIONS



S500
+
SPIKA
MS400-22



S750
+
SPIKA
MS400-22



S900
+
SPIKA
MS400-22



S1050
+
SPIKA
MS400-22



SCS700
+
SPIKA
MS400-22



SCD900
+
1/2 SPIKA
MS400-22




SCD1350
+
1/2 SPIKA
MS400-22



SCD1800
+
1/2 SPIKA
MS400-22

TECHNICAL SCHEME

SPIKA MS400-22

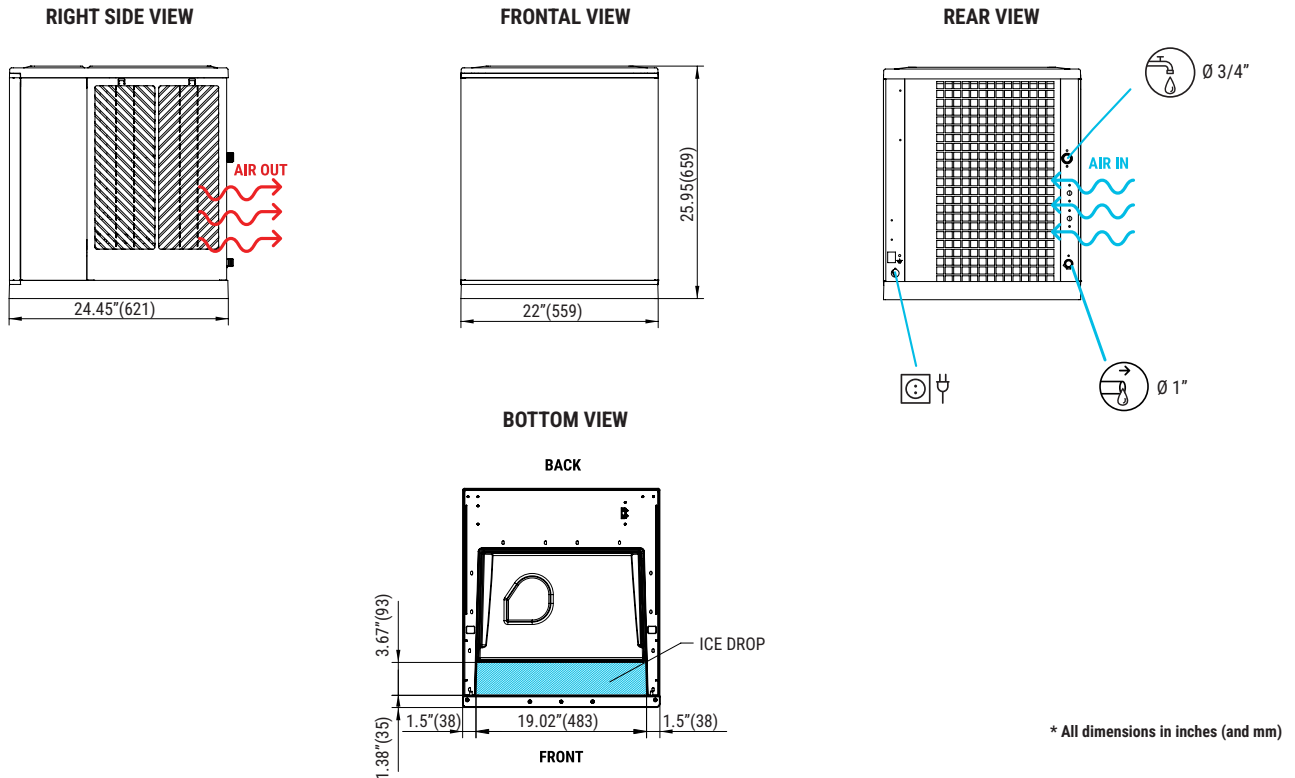

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

150/300 Ice cubes/cycle

V	Hz	ph
115	60	1N

HALF DICE		SPIKA MS400-22 AIR COOLED				
		50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°		441	430	417	414	
68° 21°		432	417	403	401	
90° 32°		370	357	348	344	
109° 43°		276	265	256	249	

FULL DICE		SPIKA MS400-22 AIR COOLED				
		50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°		-	-	-	-	
68° 21°		-	-	-	-	
90° 32°		-	-	-	-	
109° 43°		-	-	-	-	

MODELS

		ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
SPIKA MS400-22 A		8,501	2,490	910	14/2,5	3	16	4.48	19.1 13.1	5,227 1,531	65 77
SPIKA MS400-22 W		8,501	2,490	910	14/2,5	3	16	-	- -	5,227 1,531	65 77



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST

WARRANTY:
ICE MAKERS - 3 YEARS PARTS AND LABOR
EVAPORATOR - 5 YEARS PARTS AND LABOR
COMPRESSOR - 5 YEARS PARTS



VERTICAL SYSTEM